

客 户

CUSTOMER_____

承 认 书

SPECIFICATION FOR APPROVAL

客 户 编 号

CUSTOMER PART NO: _____

品 名 编 号

DESCRIPTION NO. _____TAG-915M04_____

提 出 日 期

PRESENT DAY : _____2014-11-01_____

出 图 DRAWING			客户承认 CUSTOMER APPROVE
发 行 MADE	检 查 CHECKED	承 认 APPROVED	
Dence	Boby	Henry	
DATE: 2014.11.01			DATE:

深圳市铨顺宏科技有限公司

ShenZhen Fuwit Technology Co., Ltd.

表单编号: ST-R03-10


PRODUCT SPECIFICATION

TAG-915M04

- 专门为金属等复杂环境设计的一款陶瓷标签。 具有灵敏度高的特点。
- 可方便地应用于金属资产设备管理、枪支管理、医疗器械管理，物流等场合。

TAG-915M04 Tag is a high performance radio frequency identification (RFID) ceramic tag designed specially for mount on metal or applications where environmental extremes or exposures are required.

TAG-915M04 Tag can be applied using rivets, screws, or with a high bond strength acrylic adhesive, Making it ideally suited for a broad range of applications where mount on metal or easy material is required.

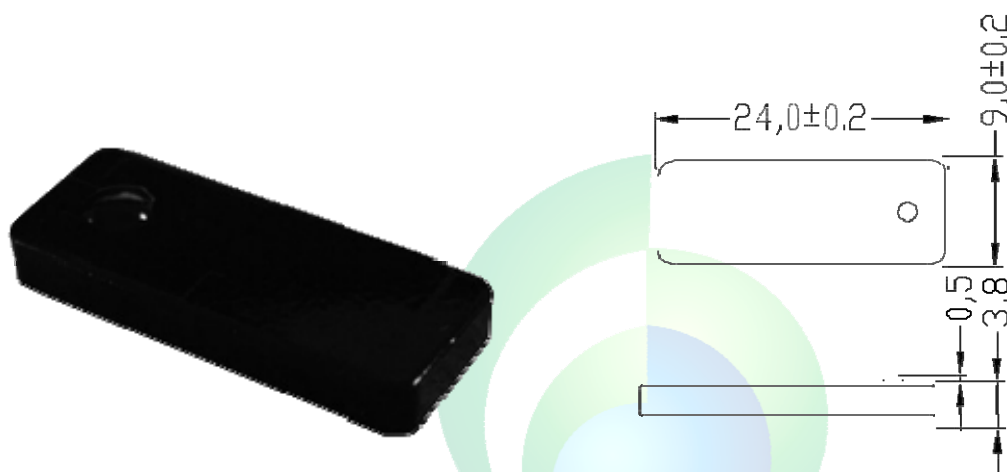

Unit: mm

➤ Feature

型号 (Model)	TAG-915M04
频率范围(Frequency Range)	902-928MHz
读写灵敏度 (Read and write sensitivity)	-15dB 大于 3 米的阅读距离 (More than 3 meters reading distance)
芯片(Chip)	NXP Ucode 8 或 Ucode 9
读写协议(Protocol Support)	ISO 18000-6C, EPC global C1Gen2
功能(Functionality)	读/写 (Read/Write)

➤ Chip

EPC	Ucode9: EPC 96bit ; kill passwords 32bit ; TID 48bit
TID	48 bits
访问指令(Access Password)	32 bits
杀死指令(Kill Password)	32 bits
数据保存时间 (EEPROM Data Retention)	10 Year
可擦写次数 (EEPROM Write Endurance)	100,000 cycles

PRODUCT SPECIFICATION

➤ Physical

物理尺寸(Tag Dimension)	24mm(L) x 9mm(W) x 3mm(H)
材料(Material)	陶瓷, 银层, 3M 背胶 (Ceramics, Silver, 3M Tape)
重量(Weight)	3.25g

➤ Environment

防水等级 (Waterproofing grade)	IP65
工作温度 (Operating Temperature)	- 22°C to +85°C
适用场合(Application)	物流、烟草、金属货架及金属货物管理、枪支管理、医疗器械等 资产跟踪管理 Logistics, Asset tracking, Supply Chain, Gun management etc

FUWIT