

客 户

CUSTOMER _____

承 认 书

SPECIFICATION FOR APPROVAL

客 户 编 号

CUSTOMER PART NO: _____

品 名 编 号

DESCRIPTION NO. RFA915-9R90-B

提 出 日 期

PRESENT DAY : 2014-07-01


| 出 图 DRAWING | | | 客户承认 CUSTOMER APPROVE |
|------------------|----------------|-----------------|--------------------------|
| 发 行 MADE | 检 查 CHECKED | 承 认 APPROVED | |
| Dence | Boby | Henry | |
| DATE: 2014.07.01 | | | DATE: |

深圳市铨顺宏科技有限公司



ShenZhen Fuwit Technology Co., Ltd.

表单编号: ST-R03-10

PRODUCT SPECIFICATION

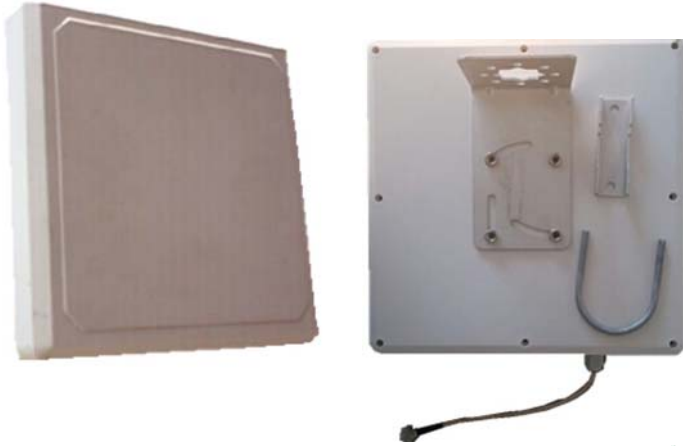

Mounting Diagram

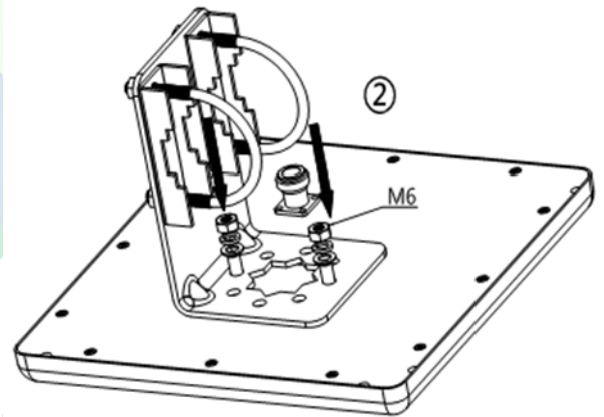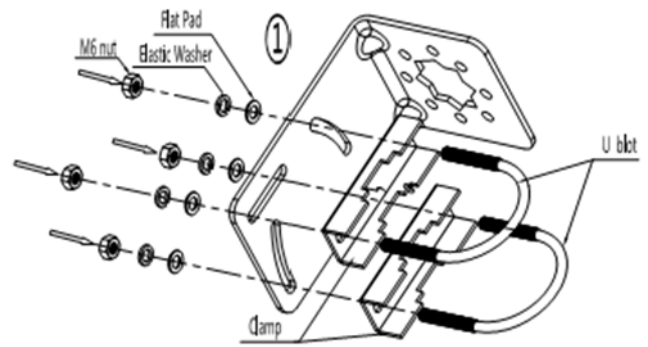


- Wide 90° Horizontal Beamwidth
- IP66 Waterproof Level
- RoHS Compliant

➤ Electrical Specifications

| | |
|-------------------------|----------------|
| Model | RFA915-9R90-B |
| Frequency Range(MHz) | 902-960MHz |
| Gain | 9dBi |
| VSWR | ≤1.5 |
| 3dB Beam-Width, H-Plane | 90° |
| 3dB Beam-Width, E-Plane | 90° |
| Polarization | Right Circular |
| Axial Ratio | <2 |
| Front to Back Ratio | ≥20 dB |
| Maximum input power | 100 Watt |
| Impedance | 50 Ω |
| Lightning Protection | DC Grounded |

➤ Mechanical Specifications

| | |
|------------------------|------------------|
| Connector | N- Female |
| Antenna Dimension | 260×260×55 mm |
| Weight | 1.1KG/1.2 KG |
| Radome Material | UV Protected ABS |
| Mounting Mast Diameter | Ø40~Ø60 mm |
| Operating temperature | -40° C to +65° C |
| Rated Wind Velocity | 216 Km/h |

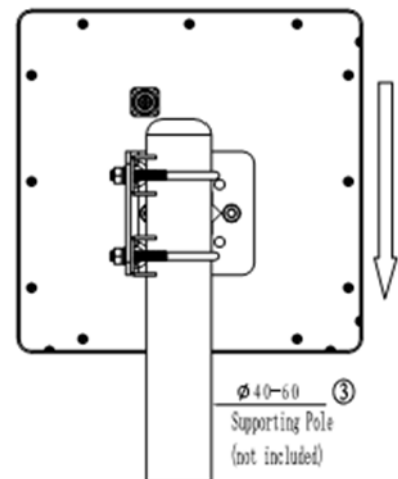

PRODUCT SPECIFICATION

➤ 3D

