

客 户

CUSTOMER_____

承 认 书

SPECIFICATION FOR APPROVAL

客 户 编 号

CUSTOMER PART NO: _____

品 名 编 号

DESCRIPTION NO. _____TAG-915M13

提 出 日 期

PRESENT DAY : _____2014-11-01

出 图 DRAWING			客户承认 CUSTOMER APPROVE
发 行 MADE	检 查 CHECKED	承 认 APPROVED	
Dence	Boby	Henry	
DATE: 2014.11.01			DATE:

深圳市铨顺宏科技有限公司

ShenZhen Fuwit Technology Co., Ltd.

表单编号: ST-R03-10


PRODUCT SPECIFICATION

TAG-915M13

- 专门为金属等复杂环境设计的一款陶瓷标签。
- 具有灵敏度高，物理特性优良的特点。
- 可方便地应用于金属资产设备管理、枪支管理、医疗器械管理，物流等场合。

TAG-915M13 Tag is a high performance radio frequency identification (RFID) ceramic tag designed specially for mount on metal or applications where environmental extremes or exposures are required.

TAG-915M13 Tag can be applied using rivets, screws, or with a high bond strength acrylic adhesive, Making it ideally suited for a broad range of applications where mount on metal or easy material is required.

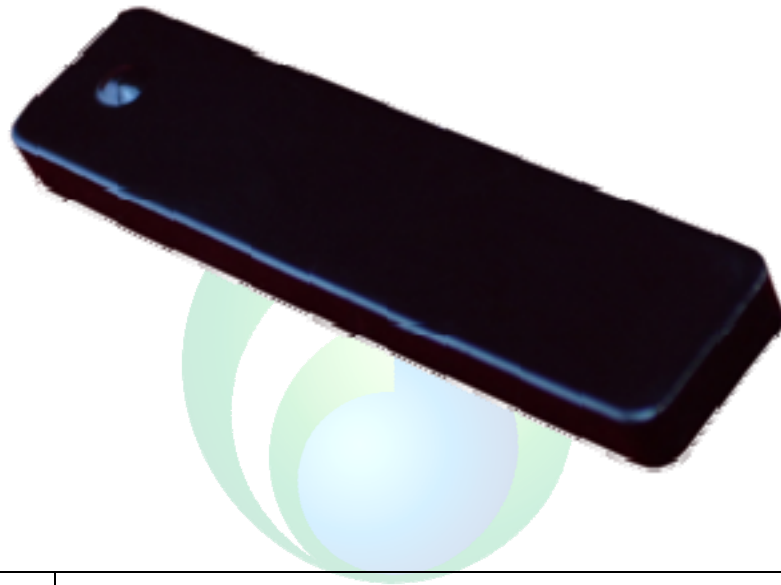

➤ Feature

型号 (Model)	TAG-915M13
频率范围(Frequency Range)	902-928MHz
读写灵敏度 (Read and write sensitivity)	-17dB 大于 4 米的阅读距离 (More than 4 meters reading distance)
芯片(Chip)	Alien H3
读写协议(Protocol Support)	ISO 18000-6C, EPC global C1Gen2
功能(Functionality)	读/写 (Read/Write)

➤ Chip

EPC	96-EPC Bits 能够扩展至 496bits (Can be extended to 496 bits)
DDR	512 User Bits
TID	64 bits
访问指令(Access Password)	32 bits
杀死指令(Kill Password)	32 bits
数据保存时间 (EEPROM Data Retention)	10 Year
可擦写次数 (EEPROM Write Endurance)	100,000 cycles

PRODUCT SPECIFICATION

➤ Physical

物理尺寸(Tag Dimension)	39mm(L) x 10mm(W) x 3mm(H)
材料(Material)	陶瓷, 银层, 3M 背胶 (Ceramics, Silver, 3M Tape)
颜色(Color)	灰色 (Gray)
重量(Weight)	5.5g

➤ Environment

防水等级 (Waterproofing grade)	IP67
工作温度 (Operating Temperature)	-20°C to +85°C
适用场合(Application)	物流、烟草、金属货架及金属货物管理、枪支管理、医疗器械等 资产跟踪管理 Logistics, Asset tracking, Supply Chain, Gun management etc

FUWIT