

客 户
CUSTOMER _____

承 认 书

SPECIFICATION FOR APPROVAL

客 户 编 号

CUSTOMER PART NO: _____

品 名 编 号

DESCRIPTION NO. _____ T30110N

提 出 日 期

PRESENT DAY : _____ 2017-2-18

出 图 DRAWING			客户承认 CUSTOMER APPROVE
发 行 MADE	检 查 CHECKED	承 认 APPROVED	
Dence	Boby	Henry	
DATE: 2017.2.18			DATE:

深圳市铨顺宏科技有限公司

ShenZhen Fuwit Technology Co., Ltd.

表单编号：ST-R03-10

FEATURES


- ◆ Ideal for short-range singulation of individual UHF tags
- ◆ Near-field design penetrates liquids and most metals
- ◆ Perfect for use with very small tag inlays featuring near field antennas
- ◆ Small size: 110 mm x 40 mm x 1.6 mm



SPECIFICATIONS

NO		Min	Typ	Max	Unit
1	Part Number	T40100N			Each
2	Type	Microstrip antenna			
3	Operating Frequency	840MHz-960MHZ			MHz
4	Polarization	Linear			
5	Peak Gain	-10			dbic
6	Beamwidth	>200			MHz
7	VSWR	1.5:1			MHz

DIMENSIONS

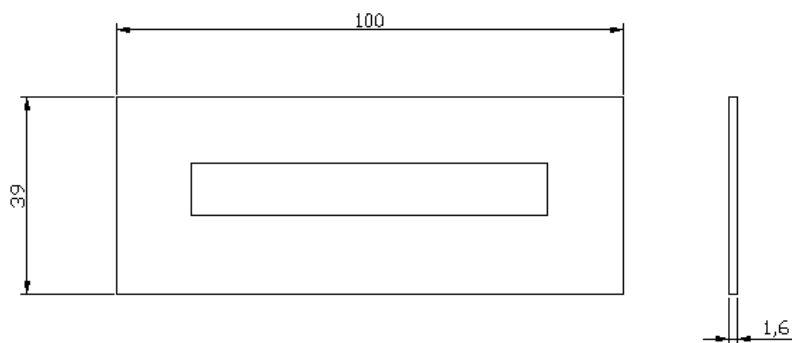

unit:MM

Radiation pattern

