

客 户

CUSTOMER _____

承 认 书

SPECIFICATION FOR APPROVAL

客 户 编 号

CUSTOMER PART NO: _____

品 名 编 号

DESCRIPTION NO. TAG-915-Tamper-Detection-Jewelry-Tag-01

提 出 日 期

PRESENT DAY : 2019/5/12

| 出 图 DRAWING | | | 客户承认 CUSTOMER APPROVE |
|-----------------|----------------|-----------------|--------------------------|
| 发 行 MADE | 检 查 CHECKED | 承 认 APPROVED | |
| Berry | Boby | Henry | |
| DATE: 2019/5/12 | | | DATE: |

深圳市铨顺宏科技有限公司

ShenZhen Fuwit Technology Co., Ltd.

表单编号: ST-R03-10

PRODUCT SPECIFICATION

TAG-915-Tamper-Detection-Jewelry-Tag-01 广泛用于珠宝首饰的柜台展示，提高产品档次，同时也用于钟表，眼镜等不同行业的防伪及溯源监管。

Widely used in jewelry count display and improve products level. It also used in watches, glasses, clocks etc. security and traceability.



➤ Feature

| | |
|--|--|
| 型号 (Model) | TAG-915-Tamper-Detection-Jewelry-Tag-01 |
| 频率范围(Frequency Range) | 860-960MHz |
| 读写灵敏度 (Read and write sensitivity) | ≥1.5 M |
| 芯片(Chip) | UCODE G2iL+ |
| 读写协议(Protocol Support) | ISO 18000-6C GEN2 Class 1 |
| 个性化编码 (Personalized Coding) | 支持内外码一致数据结构 Support Associated with inside and outside code data structure |
| 产品特性 Product Attribute | 一次性使用，防伪可侦测，防转移防篡改(如加温转移，化学转移，刀片转移等) Disposable， Anti-counterfeiting, Tamper Detection, Check on Removal, Prevent Heat Transfer, Chemical transfer, Knife transfe. |
| 功能(Functionality) | 读/写 (Read/Write) |

➤ Chip

| | |
|---------------------------|-------------------------------|
| 芯片内存容量 Memory Capacity | TID: 64-bit EPC: 128-bit |
| 工作模式 Operating Mode | 清点或读写 Inventory Read or Write |

PRODUCT SPECIFICATION

➤ Physical

| | |
|---------------------------------|---|
| 标签尺寸(Tag Dimension) | 51.2X12.3mm(±0.2mm) |
| 天线尺寸(Antenna Size) | 84X15mm(±0.5mm) |
| 成品跳距 (Product Skip Distance) | 25.0±0.4mm |
| 成品边距(Product Margin) | 5.0±1.5mm |
| 卷料宽度(Width of the Tape) | 94.0±1.5mm |
| 材料(Material) | (衬底基材) 聚酯薄膜 Polyester Film (PET) + (天线材料) 铝蚀刻 Aluminum Etching+ (表面材料) 防水 Waterproof Brittle Paper |

➤ Environment


| | |
|-------------------------------------|--|
| 数据保留 (Data retention) | 10 年 |
| 读写次数 (Read and write the number) | 100000 次 |
| 工作温度 (Operating Temperature) | -25℃~75℃ |
| 储存温度 (Storage Temperature) | 0℃~25℃ |
| 操作湿度 (Relative Humidity) | 10%~95%(As Less Reading As More Humidity) |
| 适用场合(Application) | 广泛用于珠宝首饰的柜台展示, 提高产品档次, 同时也用于钟表, 眼镜等不同行业的防伪及溯源监管。 |

➤ Packing Details

| | |
|-------------------------|--|
| 纸芯内径 Core Diameter | 76.2mm(3inch) |
| 卷数量 Volume Number | 1000~3000PCS(依实际需求而定) (According to actual demand) |
| 出卷方向 The Roll Direction | 面标朝外 (出卷方向依实际需求而定) the Surface or Printing Facing out or up (According to actual demand) |
| 包装材料 Packing Material | 防静电珍珠棉+气泡垫+防静电袋+外纸箱 Anti-static PE + Foam stuff + Anti-static Bag |

PRODUCT SPECIFICATION

➤ Reference of Graphic Performance

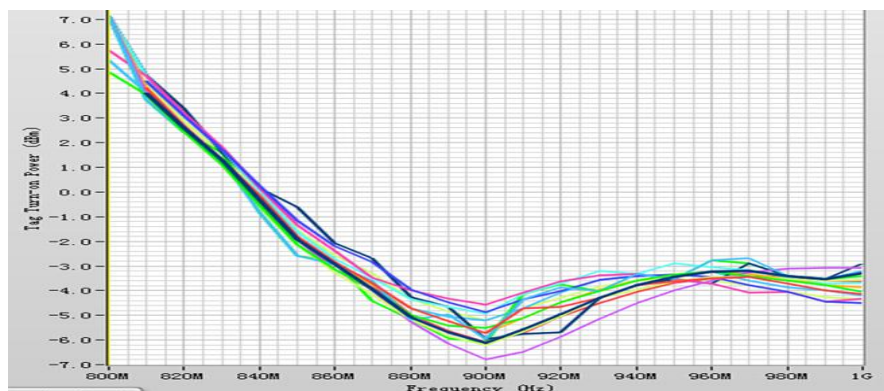

➤ Reference Pictures

